



- TASTE THE DIFFERENCE -

MODEL 180T-RMT

This machine was specially designed for self-service locations, allowing crew members to load mix into the refrigerated cabinet from the back, reducing front-of-the-house congestion. The pressurized, 2-flavor twist freezer is great for self-service, high-volume yogurt, custard and gelato shops that are very particular about quality product dispensing.

The Electro Freeze Advantage

- **Patented Mix Transfer System*** simplest and most reliable pressurized system available
- **Flexible Mix Holding System** pumps directly from bags or from mix containers
- **The Finest Frozen Product**, consistently the best frozen product available. Smooth, creamy and profitable
- **Self Closing Spigots** prevents the mess and eliminates waste
- **Adjustable Dispense Rate** set to meet your specific dispensing speed and volume requirements
- **Exclusive Auger Design** gently blends, reducing agitation, maintaining product quality and consistency.
- **Energy Conservation Mode** reduces energy cost and holds product safely during non-business hours
- **Superior Low Temperature Refrigeration System** provides the best in class production and product quality
- **Product Flexibility** serves a variety of frozen products, custard, ice cream sorbets, water ice or yogurt
- **Experience Tells** Electro Freeze has been manufacturing quality frozen treat machines since 1929. Superior engineering, product innovations, sturdy construction, quality craftsmanship and dependable performance are Electro Freeze hallmarks.
- **Superior Service Support** backed by a worldwide distributor network

*U.S. Patent #5,349,825

PRESSURIZED SOFT SERVE FREEZER

Freedom 360° Series 2 Flavor Twist




electrofreeze.com

FOR MORE INFORMATION CONTACT

800-755-4545 • sales@electrofreeze.com

180T-RMT Soft Serve Freezer

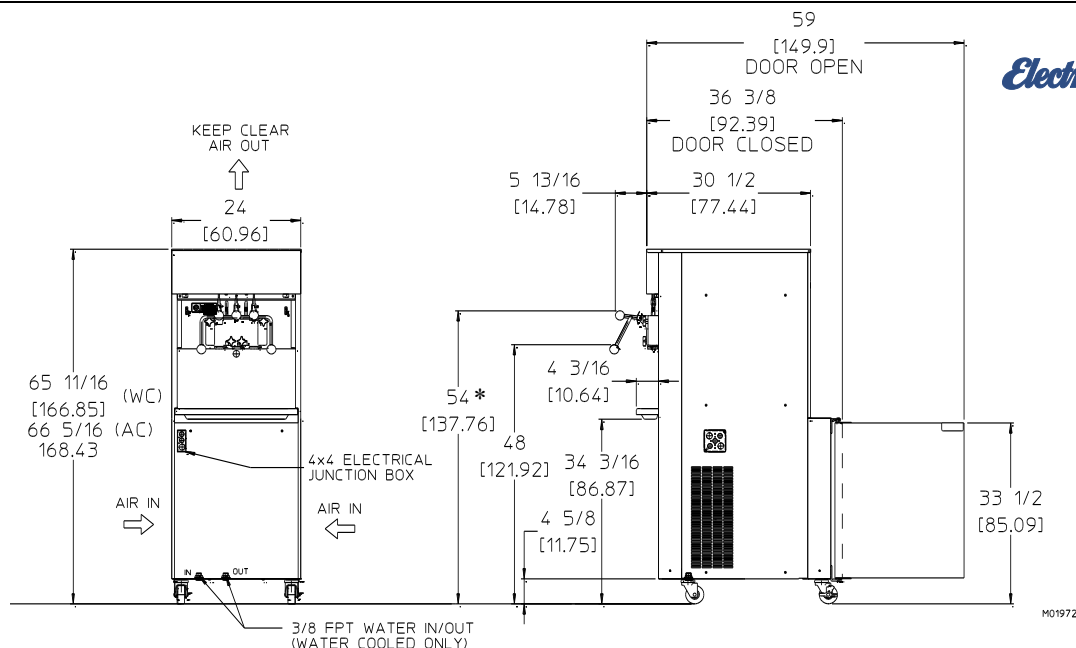

MODEL 180T-RMT SPECIFICATIONS

Due to continual product improvements all specifications are subject to change without notice.

Weights	lbs.	kgs.	
Net	752	341	
Crated	835	379.55	
	cu.ft.	cu.m.	
Volume	58.42	1.65	
Dimensions	in.	cm.	
Width	24	60.96	
Depth	36 3/8	92.39	
Height Air	66 5/16	168.43	
Height Water	65 11/16	166.85	
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	40	38	2P, 2W
208-230/60/1 Water	40	36	2P, 2W
208-230/60/3 Air	30	27.6	3P, 3W
208-230/60/3 Water	30	25.4	3P, 3W
	Total	Poles (P)	
	Amps	Wires (W)	
380-415/50/3 Air	14.1	3P, 4W	
380-415/50/3 Water	15.5	3P, 4W	
Electrical characteristics other than above available on request from factory or local distributor. Check nameplate for exact electrical data.			
Bidding Spec			
Electrical: Volt		Hz	Ph
Cooling:		Neutral	Yes
Options:			No

Electrical

One dedicated electrical connection is required. Manufactured to be permanently connected. See electrical chart for the proper requirement. Consult your local electrical codes for cord and receptacle specifications.

Beater Motor

Two, 2 hp.

Refrigeration Systems

One, 12,000 Btuh. R404a.
Separate Hopper Refrigeration, One, 1200 Btuh, R134a.
Btuh may vary depending on compressor used.

Air and Water Cooled

6" (15.2 cm) air space required at rear or both side panels and 18" (45.7cm) air space above unit for proper air circulation.

Mix Tank Capacity: two - 22 quarts (20.8 liters) each

Freezing Cylinder Capacity: two - 3.7 quarts (3.5 liters) each

*48" handle extension kit is available for ADA compliance

Certified and/or listed by:



*UL listed and listed by Underwriters Laboratories under Canadian National Standard C22.2 No. 120-M91 (R2008)
**Select Voltages @ 50HZ



Electro Freeze div. of H.C. Duke & Son, LLC

2116-8th Avenue, East Moline, Illinois 61244 USA

Phone (309) 755-4553 • (800) 755-4545

FAX (309) 755-9858

E-mail: sales@electrofreeze.com • www.electrofreeze.com

Authorized Distributor